STARTERBATTERIEN, TECHNISCHE INFORMATIONEN

Technical Information n° 1

08/04/2024

EINFÜHRUNG

Beim Austausch der Starterbatterie in modernen Autos müssen einige Vorsichtsmaßnahmen beachtet werden, wie z. B. das Zurücksetzen des IBS (Intelligenter Batteriesensor), der für die korrekte Interaktion der neuen Batterie mit dem Fahrzeug erforderlich ist.
Nachfolgend werden die drei Hauptfälle und die damit verbundenen Lernvorgänge aufgeführt, die nach dem Einbau der neuen Batterie durchzuführen sind.

FALL 1: Das Anlernen der neuen Batterie erfolgt automatisch. Nach der Installation im Fahrzeug sind keine weiteren Maßnahmen erforderlich.
Hersteller: FCA Group, PSA, Toyota, Volvo und andere.

FALL 2: Das Anlernen der neuen Batterie muss durch ein Diagnosetool erfolgen. Das richtige Verfahren ist sowohl in den Diagnosesystemen des Herstellers als auch in den gängigsten unabhängigen Systemen (Bosch, Gutmann, VCDS, Autel) bereits vorhanden und führt den Mechaniker durch verschiedene Schritte.
Wenn die Eingabe eines Seriencodes erforderlich ist, wird der Vorgang vom Tester hervorgehoben (je nach Situation kann die Eingabe einer 0 nach dem Code erforderlich sein oder die Erstellung eines bestimmten Codes – Volt, Ampere, Amperestunden als Referenz für die neue Batterie).
Hersteller: BMW, Jeep, Mazda, VAG und andere.

FALL 3: Das Anlernen der neuen Batterie muss ohne Diagnosetool erfolgen. In den technischen Daten der offiziellen und unabhängigen Diagnosesysteme ist ein spezifischer Vorgang aufgeführt, bei dem verschiedene Tasten in einer bestimmten Reihenfolge und Zeit gedrückt werden müssen.
Hersteller: Ford und andere.

AUFMERKSAMKEIT:

Wenn die Batterie nicht erlernt wird, kann dies den Betrieb verschiedener Fahrzeugsysteme (z. B. der STOP&START-Funktion) beeinträchtigen und das korrekte Laden der Zusatzbatterien (sofern vorhanden) beeinträchtigen.

ERA
QUALITY CARE PRECISION

ERA part number: A55090

Technical parameter	Value
Battery	AGM Battery
ETN	550090080
Battery Capacity [Ah]	50 Ah
Cold Cranking Amps (CCA), EN [A]	800 A
Length [mm]	260
Width [mm]	173
Height [mm]	206
Layout	9
Terminals	1
Base hold-down	B07
Case size	G34
Weight [Kg]	17,50

Layout

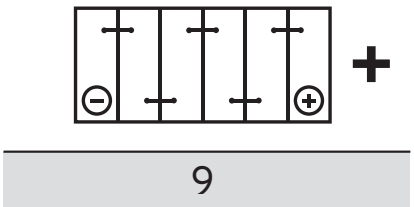

Terminals

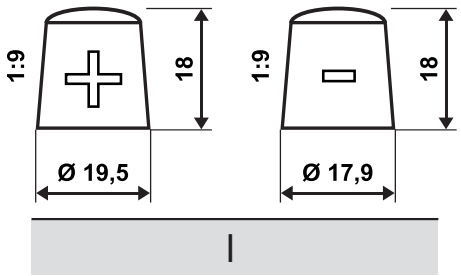

Base hold-down

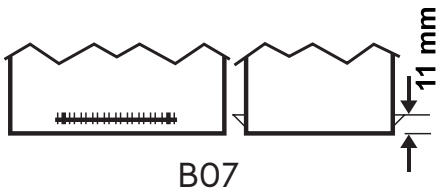

ERA
QUALITY CARE PRECISION

ERA part number: A560II

Technical parameter	Value
Battery	AGM Battery
ETN	560901066
Battery Capacity [Ah]	60 Ah
Cold Cranking Amps (CCA), EN [A]	660 A
Length [mm]	242
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	L2
Weight [Kg]	17,80

Layout

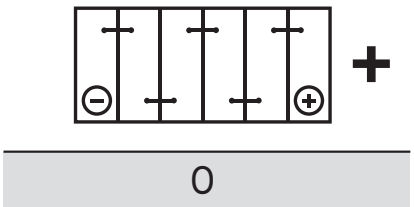

Terminals

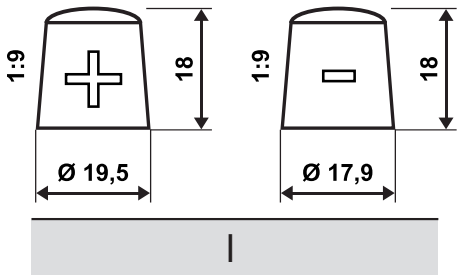

Base hold-down

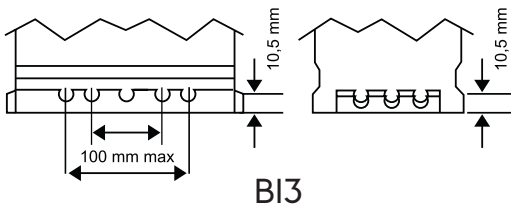

ERA
QUALITY CARE PRECISION

ERA part number: A57012

Technical parameter	Value
Battery	AGM Battery
ETN	570901072
Battery Capacity [Ah]	70 Ah
Cold Cranking Amps (CCA), EN [A]	720 A
Length [mm]	278
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	B13
Case size	H6/LN3
Weight [Kg]	20,66

Layout

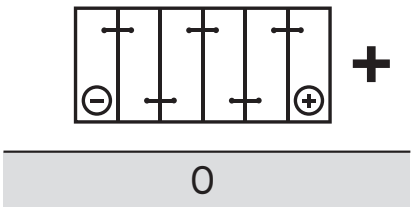

Terminals

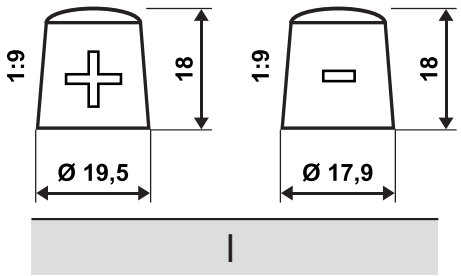

Base hold-down

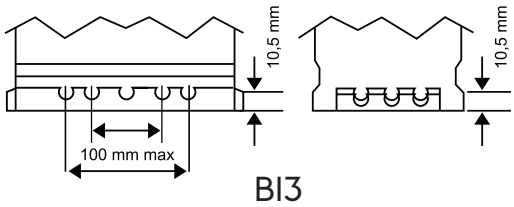

ERA
QUALITY CARE PRECISION

ERA part number: A58013

Technical parameter	Value
Battery	AGM Battery
ETN	580901076
Battery Capacity [Ah]	80 Ah
Cold Cranking Amps (CCA), EN [A]	760 A
Length [mm]	315
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	B13
Case size	H7/LN4
Weight [Kg]	23,39

Layout

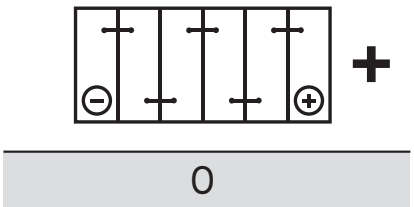

Terminals

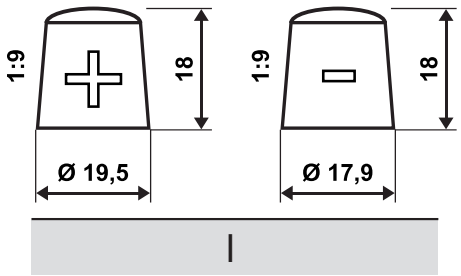

Base hold-down

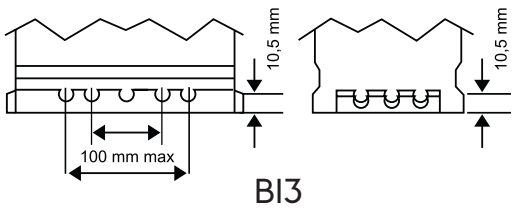

ERA
QUALITY CARE PRECISION

ERA part number: A59514

Technical parameter	Value
Battery	AGM Battery
ETN	595901081
Battery Capacity [Ah]	95 Ah
Cold Cranking Amps (CCA), EN [A]	810 A
Length [mm]	353
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	B13
Case size	L5
Weight [Kg]	25,90

Layout

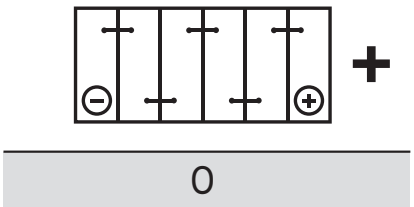

Terminals

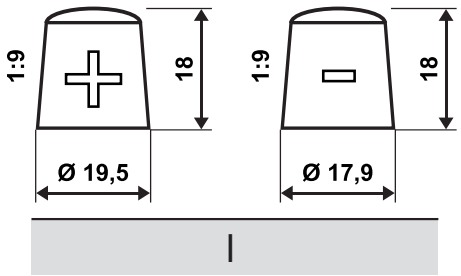

Base hold-down

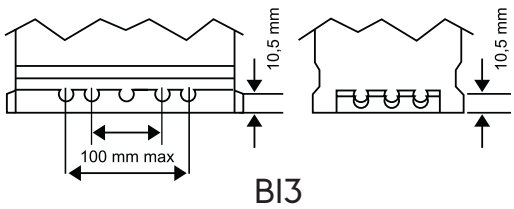

ERA
QUALITY CARE PRECISION

ERA part number: A60515

Technical parameter	Value
Battery	AGM Battery
ETN	605901091
Battery Capacity [Ah]	105 Ah
Cold Cranking Amps (CCA), EN [A]	910 A
Length [mm]	394
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	L6
Weight [Kg]	29,00

Layout

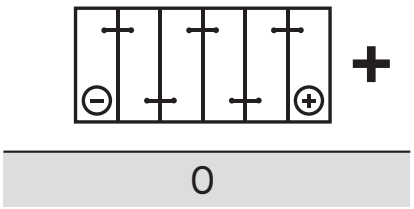

Terminals

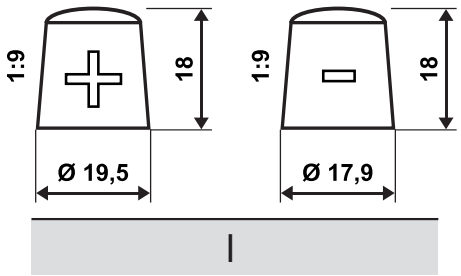

Base hold-down

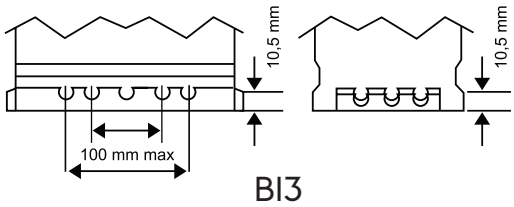

ERA
QUALITY CARE PRECISION

ERA part number: E550II

Technical parameter	Value
Battery	EFB Battery
ETN	550011048
Battery Capacity [Ah]	55 Ah
Cold Cranking Amps (CCA), EN [A]	480 A
Length [mm]	207
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	1
Base hold-down	B13
Case size	L01
Weight [Kg]	13,90

Layout

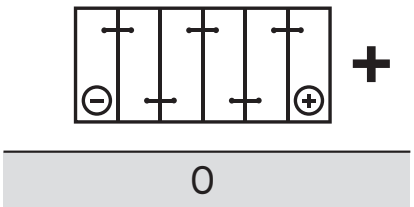

Terminals

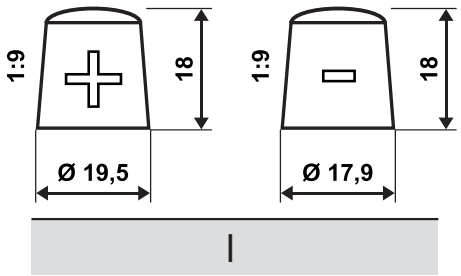

Base hold-down

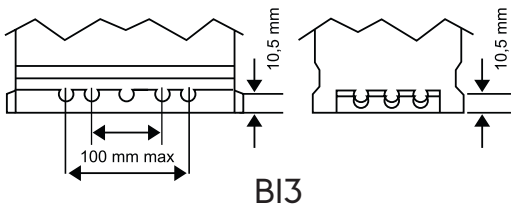

ERA
QUALITY CARE PRECISION

ERA part number: E56010

Technical parameter	Value
Battery	EFB Battery
ETN	560010052
Battery Capacity [Ah]	60 Ah
Cold Cranking Amps (CCA), EN [A]	520 A
Length [mm]	230
Width [mm]	173
Height [mm]	222
Layout	0
Terminals	1
Base hold-down	B00
Case size	D23
Weight [Kg]	16,20

Layout

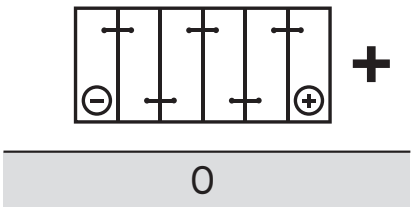

Terminals

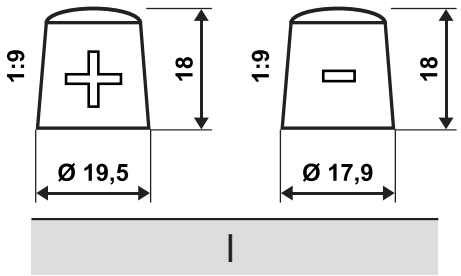

Base hold-down



B00

ERA
QUALITY CARE PRECISION

ERA part number: E560II

Technical parameter	Value
Battery	EFB Battery
ETN	560500064
Battery Capacity [Ah]	60 Ah
Cold Cranking Amps (CCA), EN [A]	640 A
Length [mm]	242
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H5/LN2
Weight [Kg]	16,12

Layout

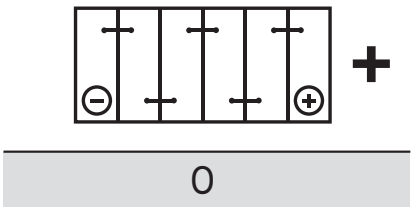

Terminals

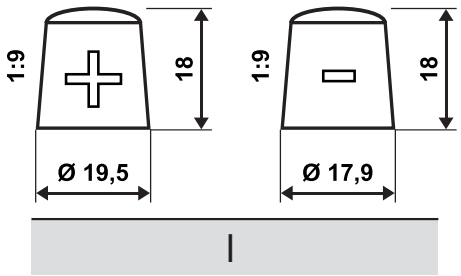

Base hold-down

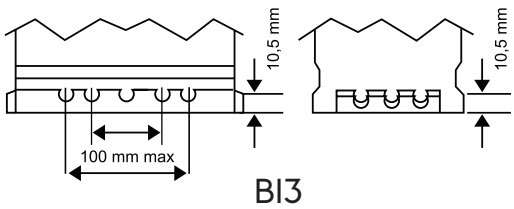

ERA
QUALITY CARE PRECISION

ERA part number: E565I2

Technical parameter	Value
Battery	EFB Battery
ETN	565500065
Battery Capacity [Ah]	65 Ah
Cold Cranking Amps (CCA), EN [A]	650 A
Length [mm]	278
Width [mm]	I75
Height [mm]	I75
Layout	0
Terminals	I
Base hold-down	BI3
Case size	T6/LB3
Weight [Kg]	I7,32

Layout

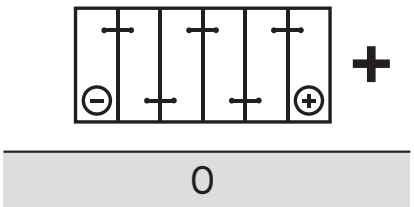

Terminals

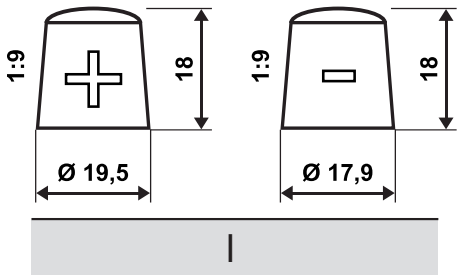

Base hold-down

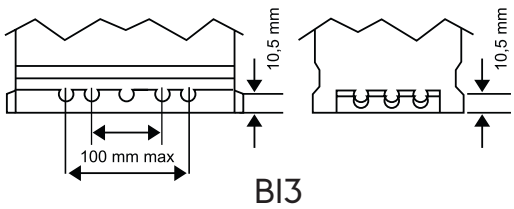

ERA
QUALITY CARE PRECISION

ERA part number: E565II

Technical parameter	Value
Battery	EFB Battery
ETN	565502065
Battery Capacity [Ah]	65 Ah
Cold Cranking Amps (CCA), EN [A]	650 A
Length [mm]	232
Width [mm]	173
Height [mm]	225
Layout	0
Terminals	I
Base hold-down	B00
Case size	D23
Weight [Kg]	16,67

Layout

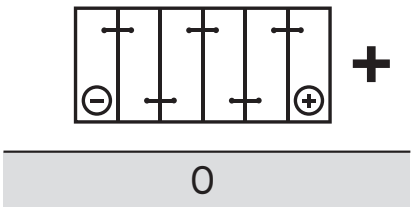

Terminals

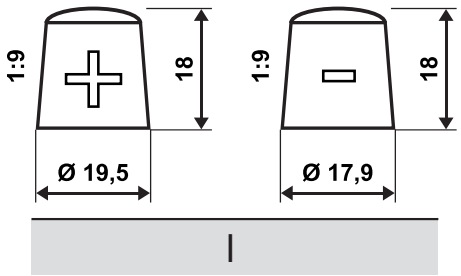

Base hold-down



B00

ERA
QUALITY CARE PRECISION

ERA part number: E57013

Technical parameter	Value
Battery	EFB Battery
ETN	570500070
Battery Capacity [Ah]	70 Ah
Cold Cranking Amps (CCA), EN [A]	700 A
Length [mm]	278
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	1
Base hold-down	B13
Case size	H6/LN3
Weight [Kg]	18,64

Layout

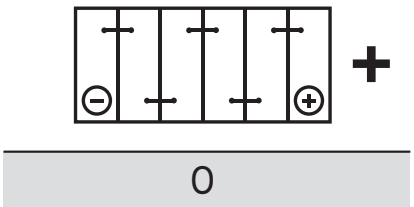

Terminals

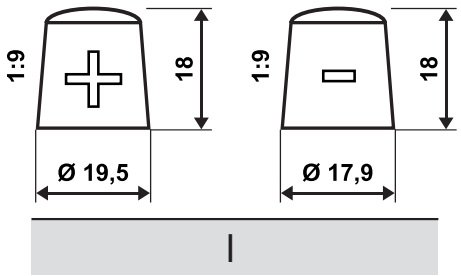

Base hold-down

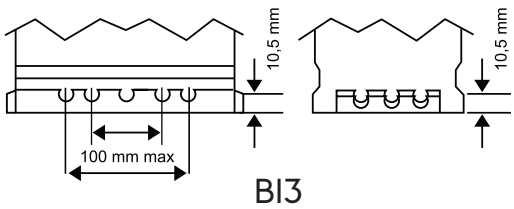

ERA
QUALITY CARE PRECISION

ERA part number: E572I0

Technical parameter	Value
Battery	EFB Battery
ETN	572502076
Battery Capacity [Ah]	72 Ah
Cold Cranking Amps (CCA), EN [A]	760 A
Length [mm]	26I
Width [mm]	I75
Height [mm]	220
Layout	0
Terminals	I
Base hold-down	B0I
Case size	D26
Weight [Kg]	I8,85

Layout

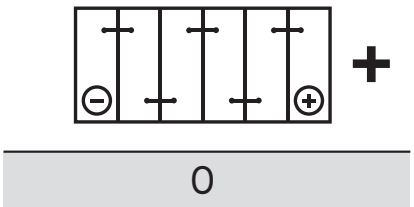

Terminals

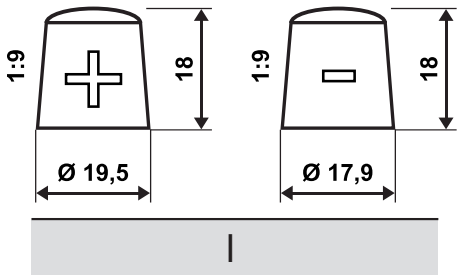

Base hold-down

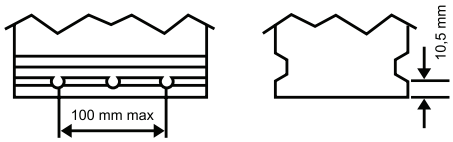

B0I

ERA
QUALITY CARE PRECISION

ERA part number: E57514

Technical parameter	Value
Battery	EFB Battery
ETN	575500073
Battery Capacity [Ah]	75 Ah
Cold Cranking Amps (CCA), EN [A]	730 A
Length [mm]	315
Width [mm]	175
Height [mm]	175
Layout	0
Terminals	1
Base hold-down	B13
Case size	T7/LB4
Weight [Kg]	19,41

Layout

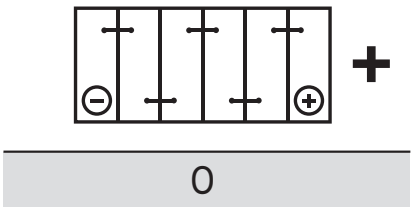

Terminals

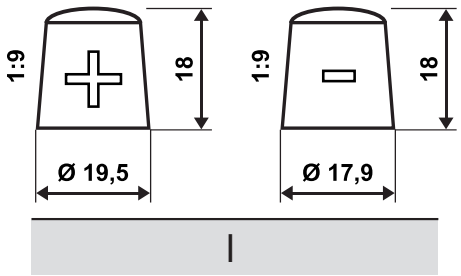

Base hold-down

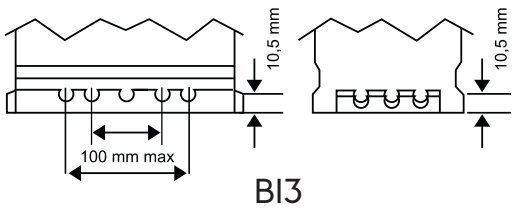

ERA
QUALITY CARE PRECISION

ERA part number: E58015

Technical parameter	Value
Battery	EFB Battery
ETN	580500073
Battery Capacity [Ah]	75 Ah
Cold Cranking Amps (CCA), EN [A]	730 A
Length [mm]	315
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	T7/LN4
Weight [Kg]	20,92

Layout

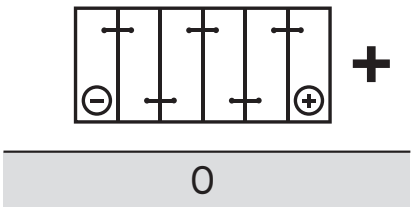

Terminals

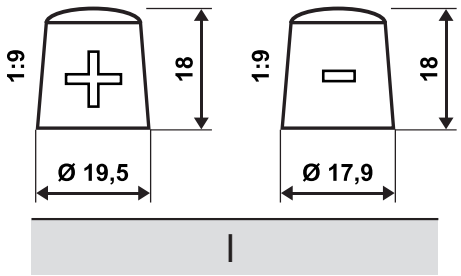

Base hold-down

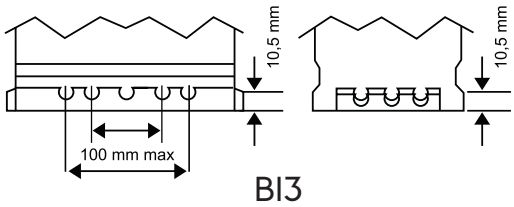

ERA
QUALITY CARE PRECISION

ERA part number: E58510

Technical parameter	Value
Battery	EFB Battery
ETN	585502080
Battery Capacity [Ah]	85 Ah
Cold Cranking Amps (CCA), EN [A]	800 A
Length [mm]	306
Width [mm]	173
Height [mm]	225
Layout	0
Terminals	1
Base hold-down	B01
Case size	D31
Weight [Kg]	21,40

Layout

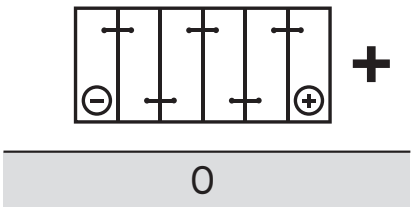

Terminals

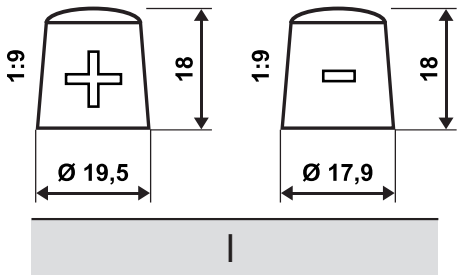

Base hold-down

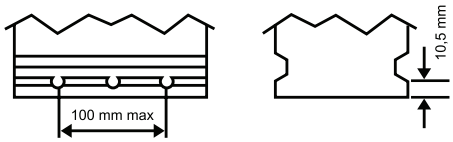

B01

ERA
QUALITY CARE PRECISION

ERA part number: E595II

Technical parameter	Value
Battery	EFB Battery
ETN	595500085
Battery Capacity [Ah]	95 Ah
Cold Cranking Amps (CCA), EN [A]	850 A
Length [mm]	353
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H8/L5
Weight [Kg]	23,52

Layout

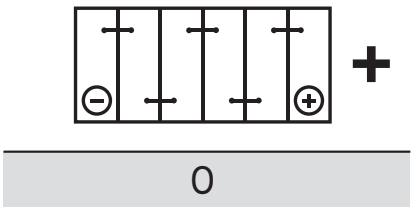

Terminals

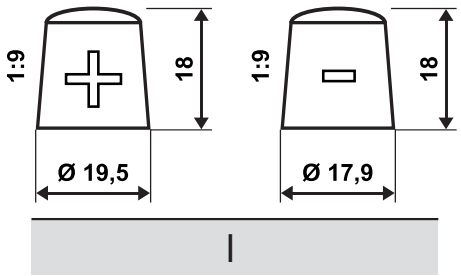

Base hold-down

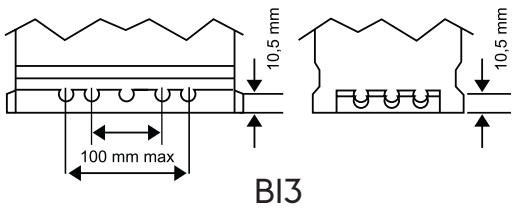

ERA
QUALITY CARE PRECISION

ERA part number: E60510

Technical parameter	Value
Battery	EFB Battery
ETN	605010095
Battery Capacity [Ah]	105 Ah
Cold Cranking Amps (CCA), EN [A]	950 A
Length [mm]	392
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	1
Base hold-down	B13
Case size	L06
Weight [Kg]	27,20

Layout

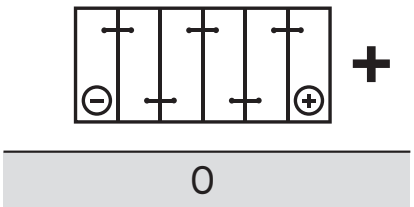

Terminals

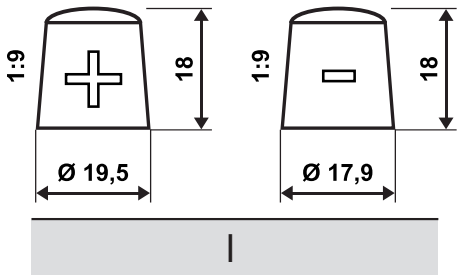

Base hold-down

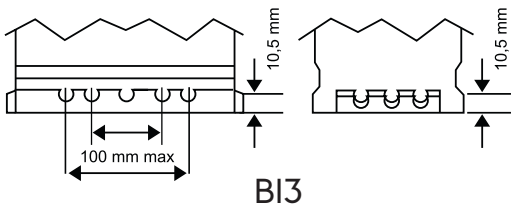

ERA
QUALITY CARE PRECISION

ERA part number: S53523

Technical parameter	Value
Battery	SLI Battery
ETN	535117030
Battery Capacity [Ah]	35 Ah
Cold Cranking Amps (CCA), EN [A]	300 A
Length [mm]	187
Width [mm]	140
Height [mm]	227
Layout	0
Terminals	3
Base hold-down	B01
Case size	B19
Weight [Kg]	9,31

Layout

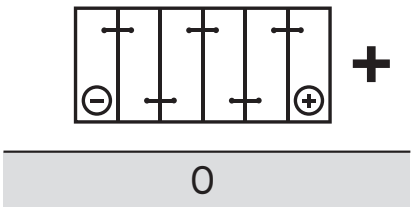

Terminals

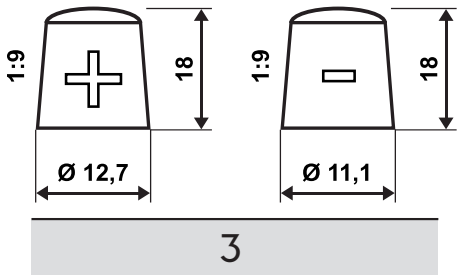

Base hold-down

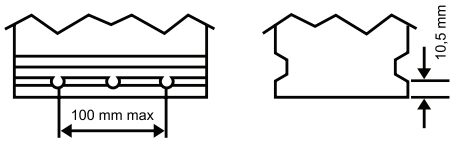

B01

ERA
QUALITY CARE PRECISION

ERA part number: S53522

Technical parameter	Value
Battery	SLI Battery
ETN	535118030
Battery Capacity [Ah]	35 Ah
Cold Cranking Amps (CCA), EN [A]	300 A
Length [mm]	187
Width [mm]	127
Height [mm]	227
Layout	0
Terminals	3
Base hold-down	B00
Case size	B19
Weight [Kg]	9,31

Layout

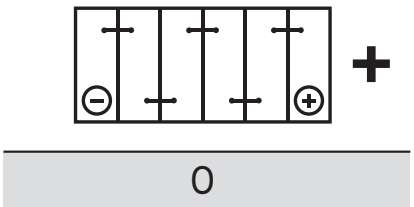

Terminals

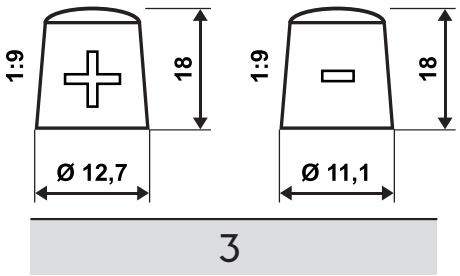

Base hold-down



B00

ERA
QUALITY CARE PRECISION

ERA part number: S53541

Technical parameter	Value
Battery	SLI Battery
ETN	535119030
Battery Capacity [Ah]	35 Ah
Cold Cranking Amps (CCA), EN [A]	300 A
Length [mm]	187
Width [mm]	127
Height [mm]	227
Layout	I
Terminals	3
Base hold-down	B00
Case size	B19
Weight [Kg]	9,31

Layout

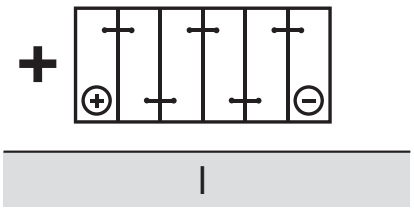

Terminals

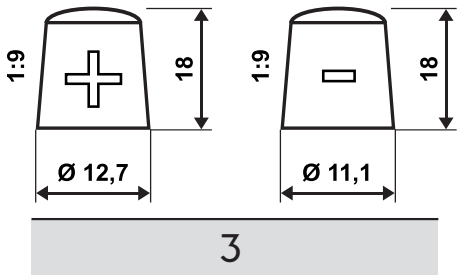

Base hold-down

B00

ERA
QUALITY CARE PRECISION

ERA part number: S54012

Technical parameter	Value
Battery	SLI Battery
ETN	540406034
Battery Capacity [Ah]	40 Ah
Cold Cranking Amps (CCA), EN [A]	340 A
Length [mm]	175
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	1
Base hold-down	B13
Case size	L0
Weight [Kg]	10,10

Layout

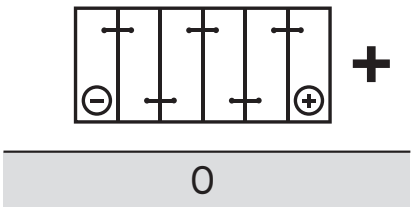

Terminals

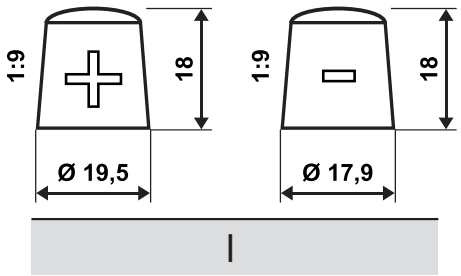

Base hold-down

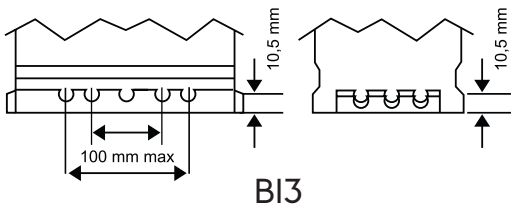

ERA
QUALITY CARE PRECISION

ERA part number: S54013

Technical parameter	Value
Battery	SLI Battery
ETN	540400036
Battery Capacity [Ah]	40 Ah
Cold Cranking Amps (CCA), EN [A]	360 A
Length [mm]	207
Width [mm]	175
Height [mm]	175
Layout	0
Terminals	I
Base hold-down	BI3
Case size	T4/LBI
Weight [Kg]	10,56

Layout

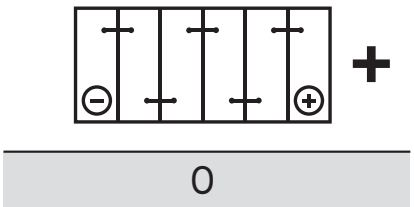

Terminals

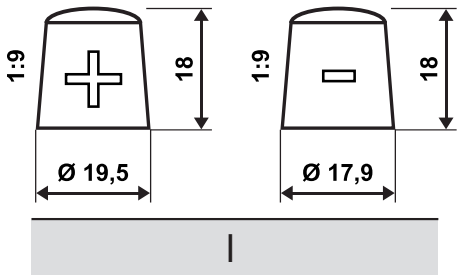

Base hold-down

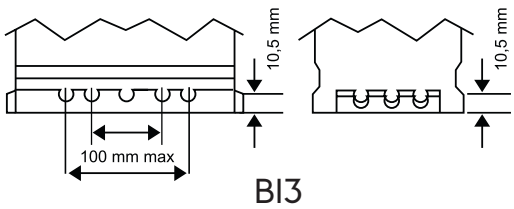

ERA
QUALITY CARE PRECISION

ERA part number: S54214

Technical parameter	Value
Battery	SLI Battery
ETN	542400039
Battery Capacity [Ah]	42 Ah
Cold Cranking Amps (CCA), EN [A]	390 A
Length [mm]	175
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	B13
Case size	L0
Weight [Kg]	10,70

Layout

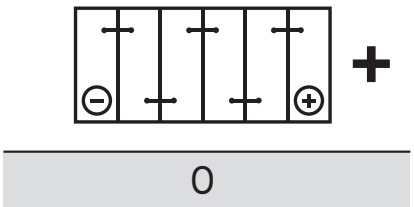

Terminals

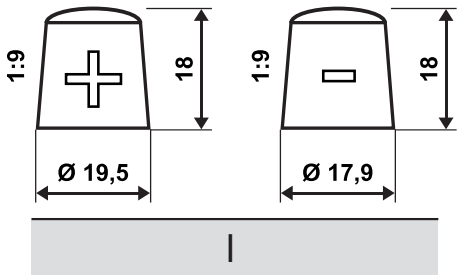

Base hold-down

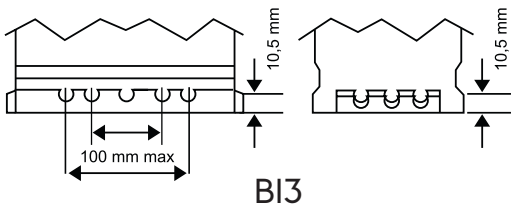

ERA
QUALITY CARE PRECISION

ERA part number: S54410

Technical parameter	Value
Battery	SLI Battery
ETN	544010040
Battery Capacity [Ah]	44 Ah
Cold Cranking Amps (CCA), EN [A]	400 A
Length [mm]	175
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	1
Base hold-down	B13
Case size	L0
Weight [Kg]	10,70

Layout

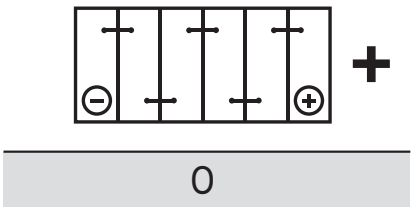

Terminals

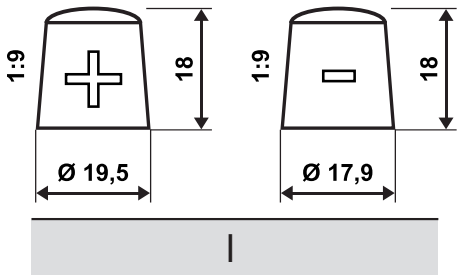

Base hold-down

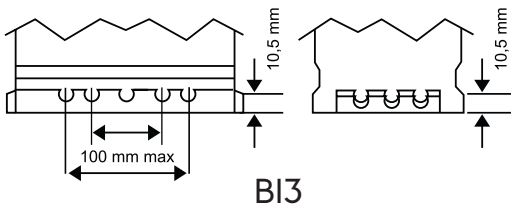

ERA
QUALITY CARE PRECISION

ERA part number: S54414

Technical parameter	Value
Battery	SLI Battery
ETN	544402044
Battery Capacity [Ah]	44 Ah
Cold Cranking Amps (CCA), EN [A]	440 A
Length [mm]	207
Width [mm]	175
Height [mm]	175
Layout	0
Terminals	1
Base hold-down	B13
Case size	T4/LB1
Weight [Kg]	11,78

Layout

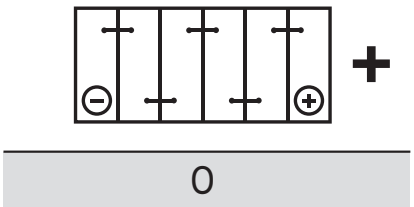

Terminals

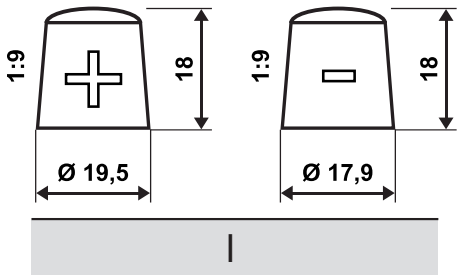

Base hold-down

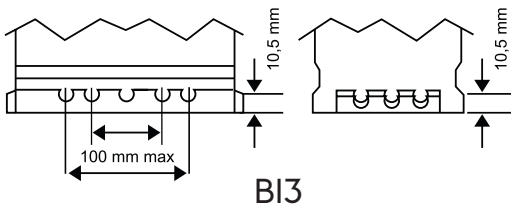

ERA
QUALITY CARE PRECISION

ERA part number: S5452I

Technical parameter	Value
Battery	SLI Battery
ETN	545I55033
Battery Capacity [Ah]	45 Ah
Cold Cranking Amps (CCA), EN [A]	330 A
Length [mm]	237
Width [mm]	I28
Height [mm]	225
Layout	0
Terminals	3
Base hold-down	B00
Case size	B24
Weight [Kg]	I2,60

Layout

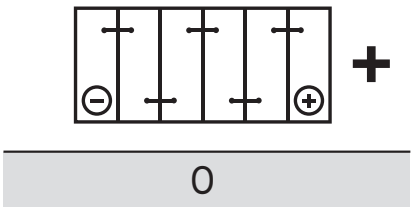

Terminals

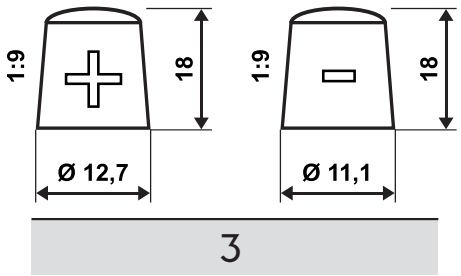

Base hold-down



B00

ERA
QUALITY CARE PRECISION

ERA part number: S54549

Technical parameter	Value
Battery	SLI Battery
ETN	545157033
Battery Capacity [Ah]	45 Ah
Cold Cranking Amps (CCA), EN [A]	330 A
Length [mm]	237
Width [mm]	128
Height [mm]	225
Layout	I
Terminals	3
Base hold-down	B00
Case size	B24
Weight [Kg]	12,60

Layout

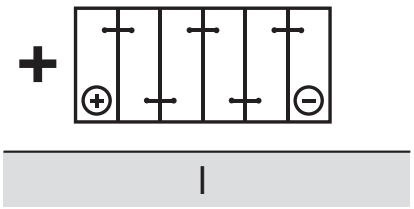

Terminals

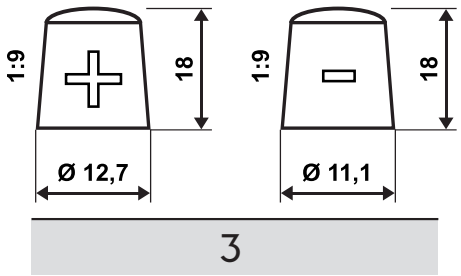

Base hold-down

B00

ERA
QUALITY CARE PRECISION

ERA part number: S54515

Technical parameter	Value
Battery	SLI Battery
ETN	545412040
Battery Capacity [Ah]	45 Ah
Cold Cranking Amps (CCA), EN [A]	400 A
Length [mm]	207
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	1
Base hold-down	B13
Case size	H4/L1
Weight [Kg]	11,96

Layout

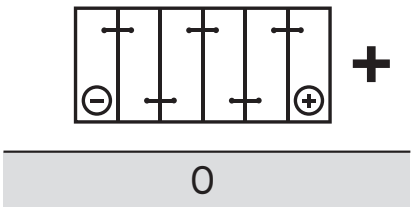

Terminals

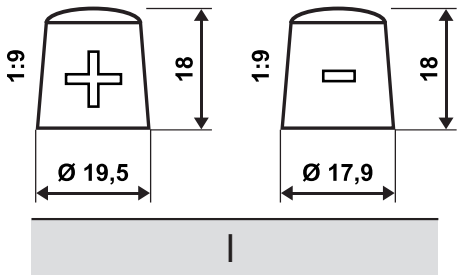

Base hold-down

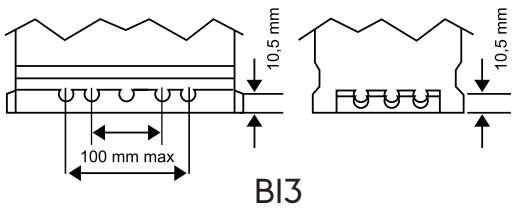

ERA
QUALITY CARE PRECISION

ERA part number: S54506

Technical parameter	Value
Battery	SLI Battery
ETN	5454I3040
Battery Capacity [Ah]	45 Ah
Cold Cranking Amps (CCA), EN [A]	400 A
Length [mm]	207
Width [mm]	I75
Height [mm]	I90
Layout	I
Terminals	I
Base hold-down	BI3
Case size	H4
Weight [Kg]	II,57

Layout

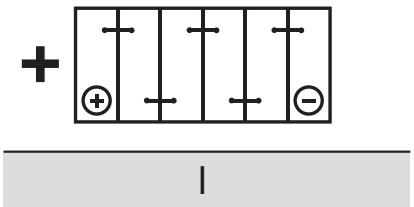

Terminals

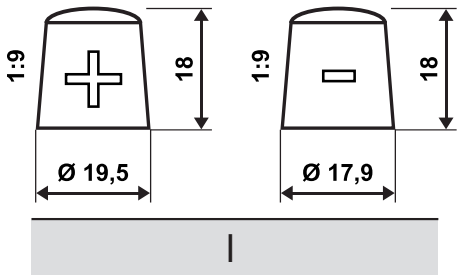

Base hold-down

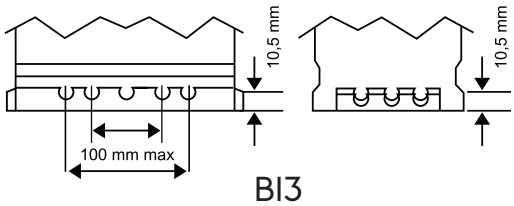

BI3

ERA
QUALITY CARE PRECISION

ERA part number: S54517

Technical parameter	Value
Battery	SLI Battery
ETN	545156033
Battery Capacity [Ah]	45 Ah
Cold Cranking Amps (CCA), EN [A]	330 A
Length [mm]	238
Width [mm]	129
Height [mm]	227
Layout	0
Terminals	I
Base hold-down	B00
Case size	B24
Weight [Kg]	11,35

Layout

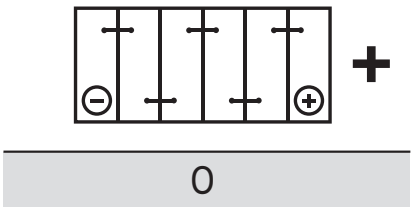

Terminals

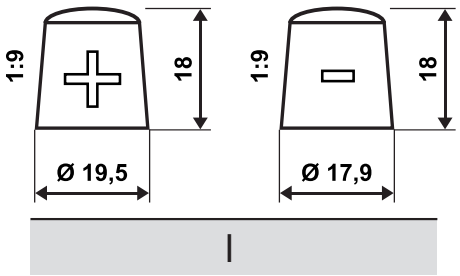

Base hold-down



B00

ERA
QUALITY CARE PRECISION

ERA part number: S54508

Technical parameter	Value
Battery	SLI Battery
ETN	545158033
Battery Capacity [Ah]	45 Ah
Cold Cranking Amps (CCA), EN [A]	330 A
Length [mm]	238
Width [mm]	129
Height [mm]	227
Layout	I
Terminals	I
Base hold-down	B00
Case size	B24
Weight [Kg]	11,35

Layout

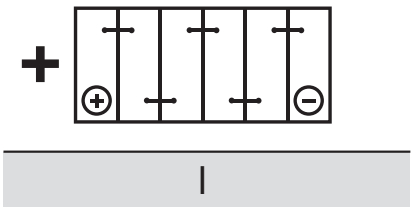

Terminals

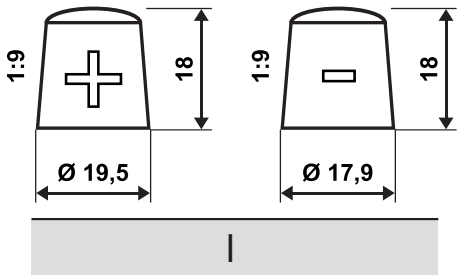

Base hold-down

B00

ERA
QUALITY CARE PRECISION

ERA part number: S55012

Technical parameter	Value
Battery	SLI Battery
ETN	550012036
Battery Capacity [Ah]	50 Ah
Cold Cranking Amps (CCA), EN [A]	360 A
Length [mm]	200
Width [mm]	173
Height [mm]	222
Layout	0
Terminals	I
Base hold-down	Korean B01
Case size	D20
Weight [Kg]	13,00

Layout

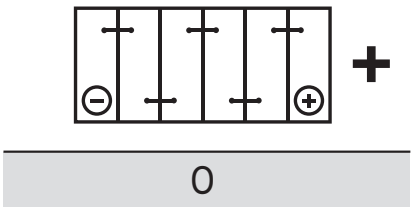

Terminals

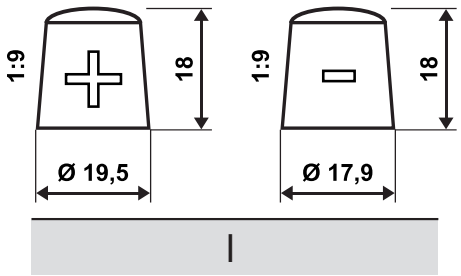

Base hold-down

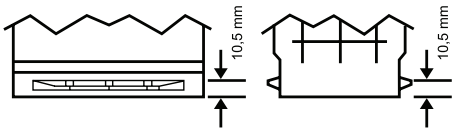

Korean B01

ERA
QUALITY CARE PRECISION

ERA part number: S552II

Technical parameter	Value
Battery	SLI Battery
ETN	552400047
Battery Capacity [Ah]	52 Ah
Cold Cranking Amps (CCA), EN [A]	470 A
Length [mm]	207
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H4
Weight [Kg]	12,14

Layout

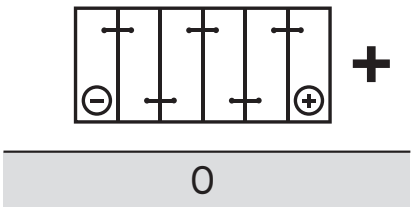

Terminals

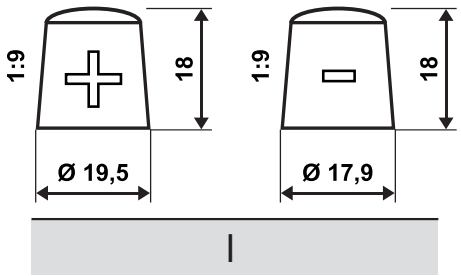

Base hold-down

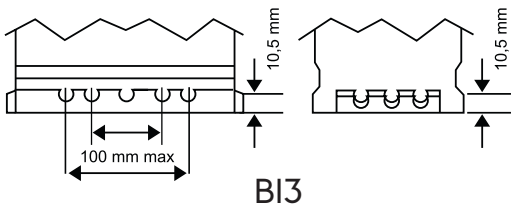

ERA
QUALITY CARE PRECISION

ERA part number: S55312

Technical parameter	Value
Battery	SLI Battery
ETN	553400047
Battery Capacity [Ah]	53 Ah
Cold Cranking Amps (CCA), EN [A]	470 A
Length [mm]	242
Width [mm]	175
Height [mm]	175
Layout	0
Terminals	I
Base hold-down	BI3
Case size	T5/LB2
Weight [Kg]	13,42

Layout

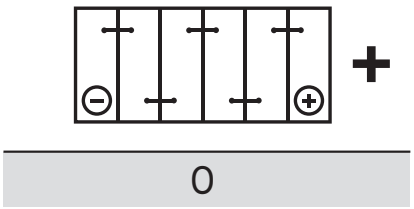

Terminals

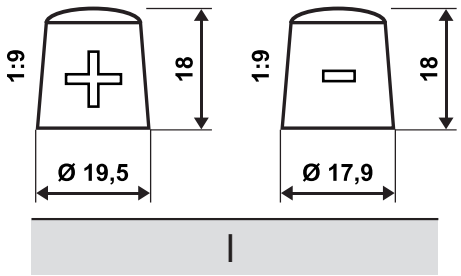

Base hold-down

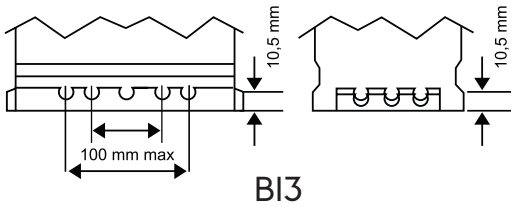

ERA
QUALITY CARE PRECISION

ERA part number: S556I3

Technical parameter	Value
Battery	SLI Battery
ETN	556400048
Battery Capacity [Ah]	56 Ah
Cold Cranking Amps (CCA), EN [A]	480 A
Length [mm]	242
Width [mm]	I75
Height [mm]	I90
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H5
Weight [Kg]	I3,44

Layout

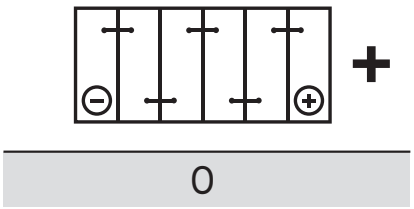

Terminals

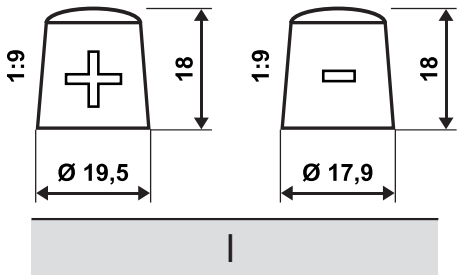

Base hold-down

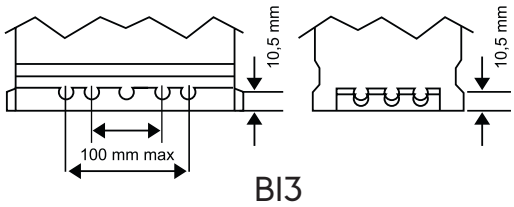

ERA
QUALITY CARE PRECISION

ERA part number: S56010

Technical parameter	Value
Battery	SLI Battery
ETN	560010048
Battery Capacity [Ah]	60 Ah
Cold Cranking Amps (CCA), EN [A]	480 A
Length [mm]	230
Width [mm]	172
Height [mm]	222
Layout	0
Terminals	1
Base hold-down	Korean B01
Case size	D23
Weight [Kg]	14,68

Layout

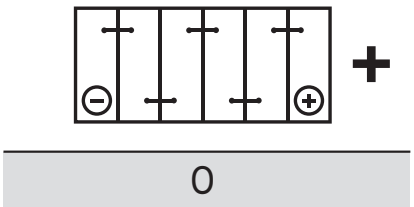

Terminals

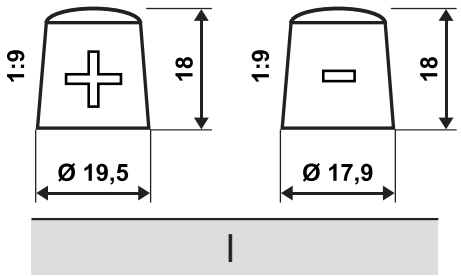

Base hold-down

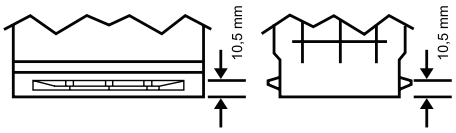

Korean B01

ERA
QUALITY CARE PRECISION

ERA part number: S56017

Technical parameter	Value
Battery	SLI Battery
ETN	560408054
Battery Capacity [Ah]	60 Ah
Cold Cranking Amps (CCA), EN [A]	540 A
Length [mm]	242
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H5/LN2
Weight [Kg]	14,72

Layout

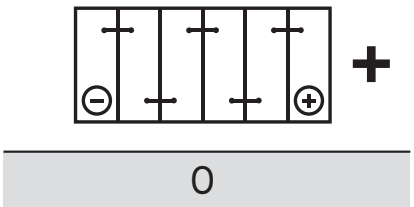

Terminals

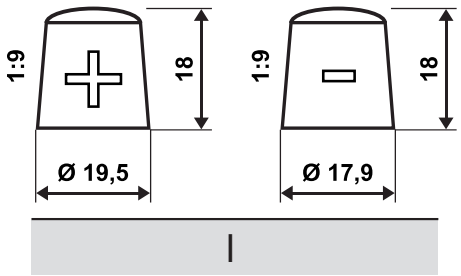

Base hold-down

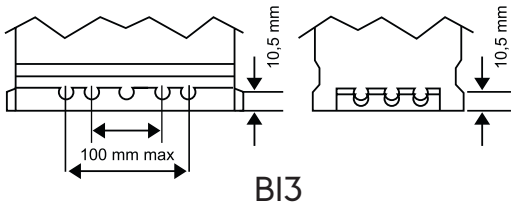

ERA
QUALITY CARE PRECISION

ERA part number: S56016

Technical parameter	Value
Battery	SLI Battery
ETN	560409054
Battery Capacity [Ah]	60 Ah
Cold Cranking Amps (CCA), EN [A]	540 A
Length [mm]	242
Width [mm]	175
Height [mm]	175
Layout	0
Terminals	I
Base hold-down	BI3
Case size	T5
Weight [Kg]	13,83

Layout

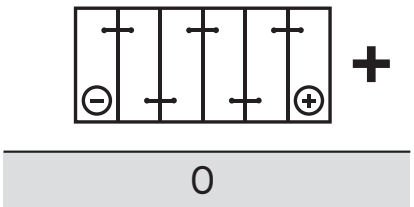

Terminals

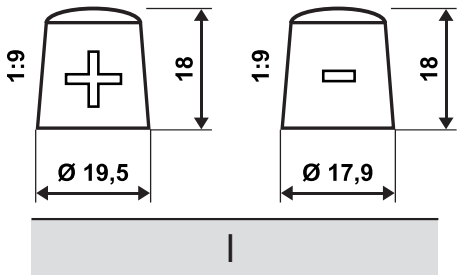

Base hold-down

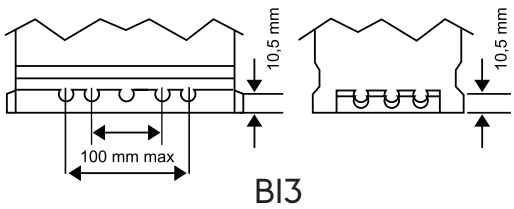

ERA
QUALITY CARE PRECISION

ERA part number: S56014

Technical parameter	Value
Battery	SLI Battery
ETN	560412051
Battery Capacity [Ah]	60 Ah
Cold Cranking Amps (CCA), EN [A]	510 A
Length [mm]	232
Width [mm]	173
Height [mm]	225
Layout	0
Terminals	1
Base hold-down	B00
Case size	D23
Weight [Kg]	14,05

Layout

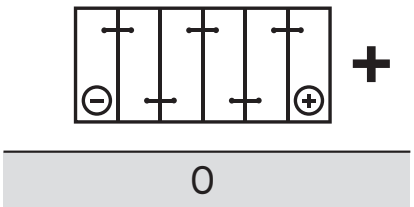

Terminals

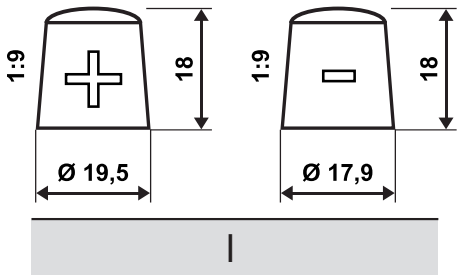

Base hold-down



B00

ERA
QUALITY CARE PRECISION

ERA part number: S56005

Technical parameter	Value
Battery	SLI Battery
ETN	560413051
Battery Capacity [Ah]	60 Ah
Cold Cranking Amps (CCA), EN [A]	510 A
Length [mm]	232
Width [mm]	173
Height [mm]	225
Layout	I
Terminals	I
Base hold-down	B00
Case size	D23
Weight [Kg]	14,05

Layout

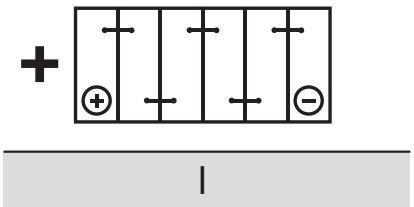

Terminals

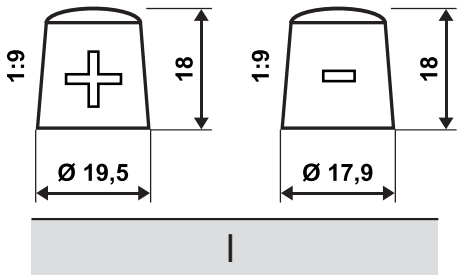

Base hold-down

B00

ERA
QUALITY CARE PRECISION

ERA part number: S565II

Technical parameter	Value
Battery	SLI Battery
ETN	5650II058
Battery Capacity [Ah]	65 Ah
Cold Cranking Amps (CCA), EN [A]	580 A
Length [mm]	230
Width [mm]	173
Height [mm]	222
Layout	0
Terminals	I
Base hold-down	Korean BOI
Case size	D23
Weight [Kg]	16,80

Layout

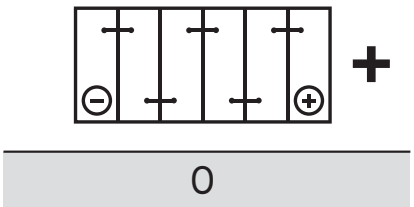

Terminals

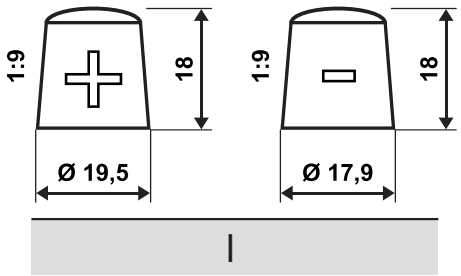

Base hold-down

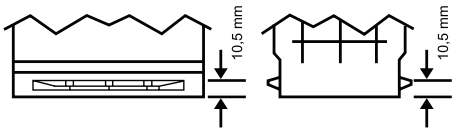

Korean BOI

ERA
QUALITY CARE PRECISION

ERA part number: S56812

Technical parameter	Value
Battery	SLI Battery
ETN	568403057
Battery Capacity [Ah]	68 Ah
Cold Cranking Amps (CCA), EN [A]	570 A
Length [mm]	278
Width [mm]	175
Height [mm]	175
Layout	0
Terminals	I
Base hold-down	BI3
Case size	T6
Weight [Kg]	15,33

Layout

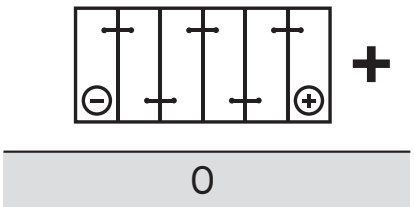

Terminals

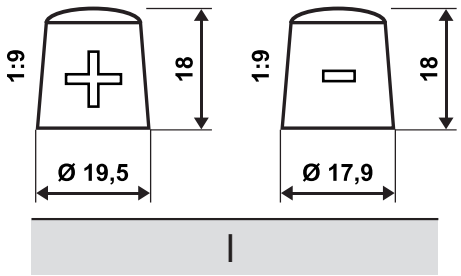

Base hold-down

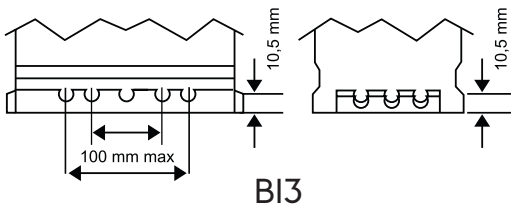

ERA
QUALITY CARE PRECISION

ERA part number: S56819

Technical parameter	Value
Battery	SLI Battery
ETN	568404055
Battery Capacity [Ah]	68 Ah
Cold Cranking Amps (CCA), EN [A]	550 A
Length [mm]	259
Width [mm]	178
Height [mm]	222
Layout	0
Terminals	1
Base hold-down	B01
Case size	D26/M10
Weight [Kg]	17,04

Layout

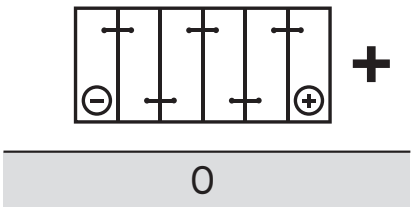

Terminals

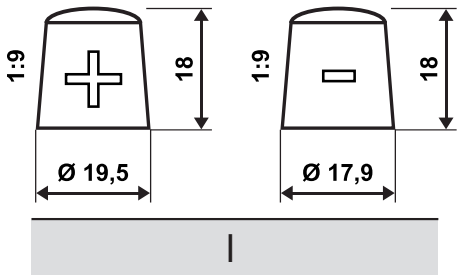

Base hold-down

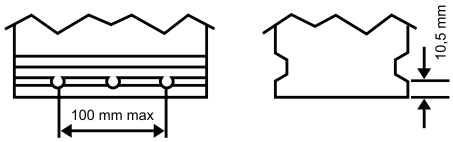

B01

ERA
QUALITY CARE PRECISION

ERA part number: S56808

Technical parameter	Value
Battery	SLI Battery
ETN	568405055
Battery Capacity [Ah]	68 Ah
Cold Cranking Amps (CCA), EN [A]	550 A
Length [mm]	259
Width [mm]	178
Height [mm]	222
Layout	I
Terminals	I
Base hold-down	B01
Case size	D26/M10
Weight [Kg]	17,04

Layout

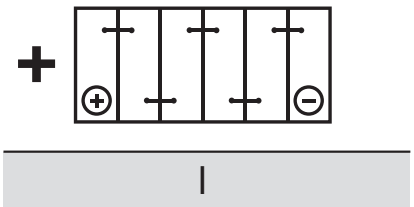

Terminals

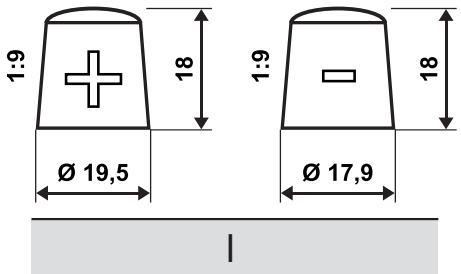

Base hold-down

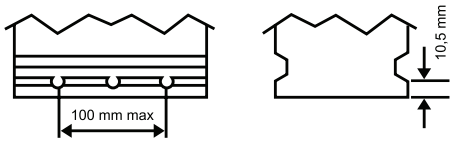

B01

ERA
QUALITY CARE PRECISION

ERA part number: S57001

Technical parameter	Value
Battery	SLI Battery
ETN	57041 0064
Battery Capacity [Ah]	70 Ah
Cold Cranking Amps (CCA), EN [A]	640 A
Length [mm]	278
Width [mm]	175
Height [mm]	190
Layout	I
Terminals	I
Base hold-down	BI3
Case size	H6/LN3
Weight [Kg]	16,97

Layout

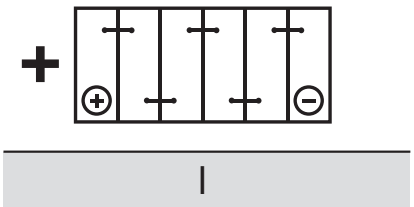

Terminals

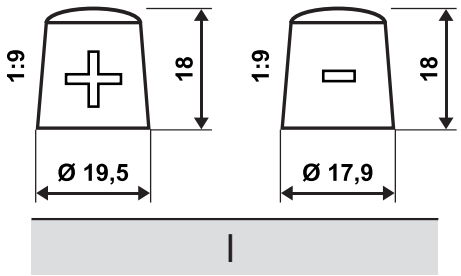

Base hold-down

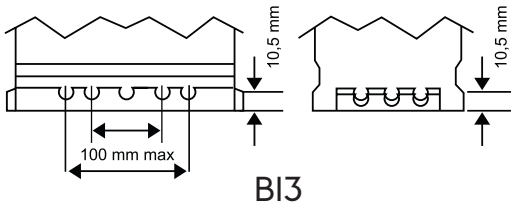

BI3

ERA
QUALITY CARE PRECISION

ERA part number: S572I2

Technical parameter	Value
Battery	SLI Battery
ETN	572409068
Battery Capacity [Ah]	72 Ah
Cold Cranking Amps (CCA), EN [A]	680 A
Length [mm]	278
Width [mm]	I75
Height [mm]	I75
Layout	0
Terminals	I
Base hold-down	BI3
Case size	T6/LB3
Weight [Kg]	I6,80

Layout

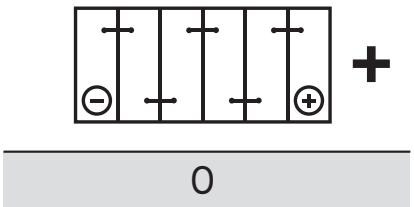

Terminals

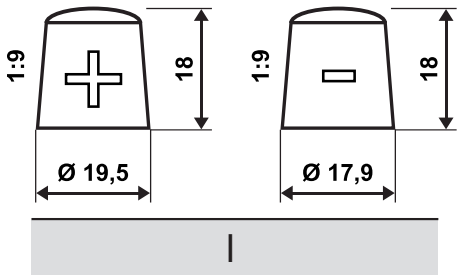

Base hold-down

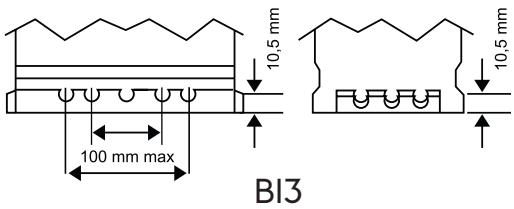

ERA
QUALITY CARE PRECISION

ERA part number: S574II

Technical parameter	Value
Battery	SLI Battery
ETN	574I04068
Battery Capacity [Ah]	74 Ah
Cold Cranking Amps (CCA), EN [A]	680 A
Length [mm]	278
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H6/LN3
Weight [Kg]	18,45

Layout

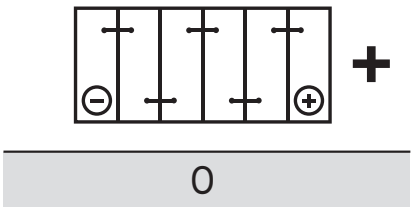

Terminals

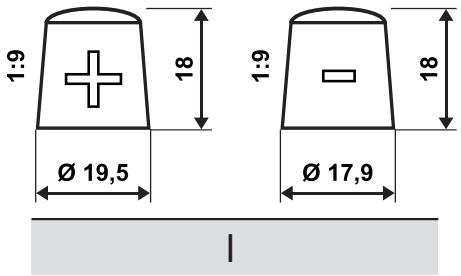

Base hold-down

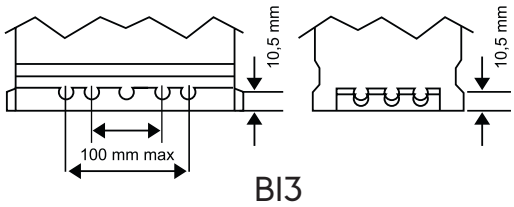

ERA
QUALITY CARE PRECISION

ERA part number: S57715

Technical parameter	Value
Battery	SLI Battery
ETN	577400078
Battery Capacity [Ah]	79 Ah
Cold Cranking Amps (CCA), EN [A]	725 A
Length [mm]	278
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	L3
Weight [Kg]	17,80

Layout

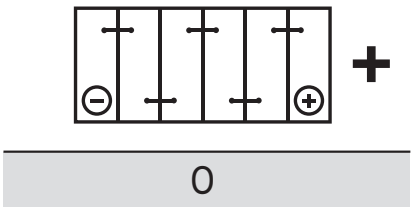

Terminals

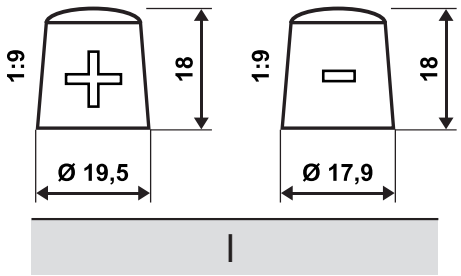

Base hold-down

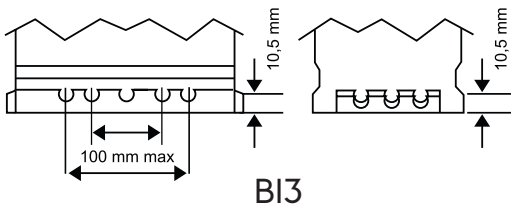

ERA
QUALITY CARE PRECISION

ERA part number: S58012

Technical parameter	Value
Battery	SLI Battery
ETN	580406074
Battery Capacity [Ah]	80 Ah
Cold Cranking Amps (CCA), EN [A]	740 A
Length [mm]	315
Width [mm]	175
Height [mm]	175
Layout	0
Terminals	I
Base hold-down	B13
Case size	T7/LB4
Weight [Kg]	19,08

Layout

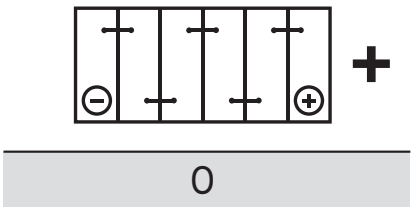

Terminals

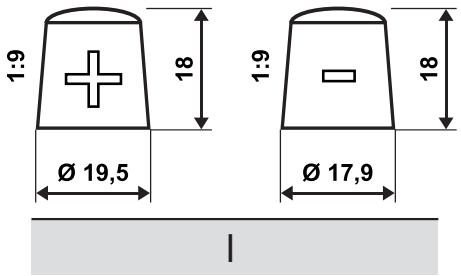

Base hold-down

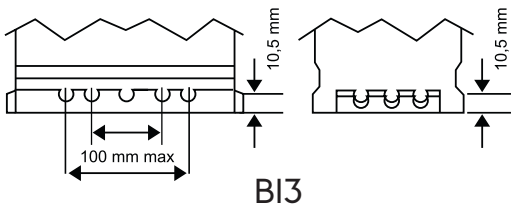

ERA
QUALITY CARE PRECISION

ERA part number: S58313

Technical parameter	Value
Battery	SLI Battery
ETN	583400072
Battery Capacity [Ah]	83 Ah
Cold Cranking Amps (CCA), EN [A]	720 A
Length [mm]	353
Width [mm]	175
Height [mm]	175
Layout	0
Terminals	1
Base hold-down	B13
Case size	T8
Weight [Kg]	19,24

Layout

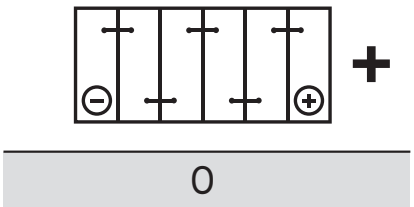

Terminals

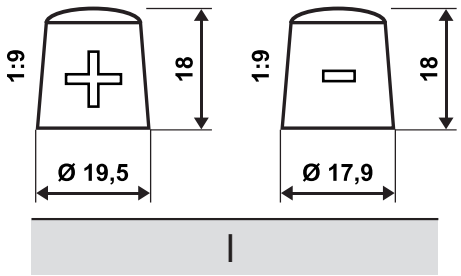

Base hold-down

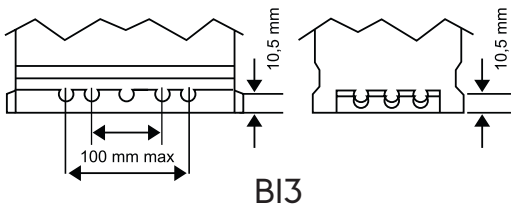

ERA
QUALITY CARE PRECISION

ERA part number: S59014

Technical parameter	Value
Battery	SLI Battery
ETN	590122072
Battery Capacity [Ah]	90 Ah
Cold Cranking Amps (CCA), EN [A]	720 A
Length [mm]	353
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H8
Weight [Kg]	20,34

Layout

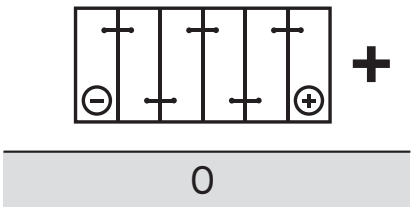

Terminals

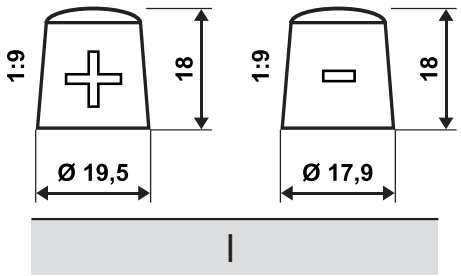

Base hold-down

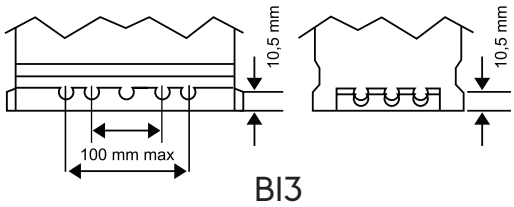

ERA
QUALITY CARE PRECISION

ERA part number: S59III

Technical parameter	Value
Battery	SLI Battery
ETN	591400074
Battery Capacity [Ah]	91 Ah
Cold Cranking Amps (CCA), EN [A]	740 A
Length [mm]	305
Width [mm]	178
Height [mm]	222
Layout	0
Terminals	I
Base hold-down	B01
Case size	D3/MII
Weight [Kg]	20,74

Layout

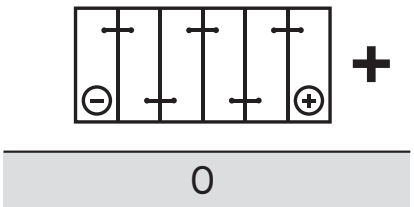

Terminals

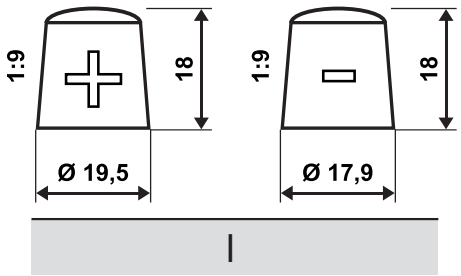

Base hold-down

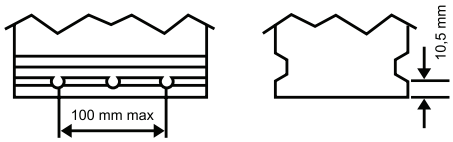

B01

ERA
QUALITY CARE PRECISION

ERA part number: S59100

Technical parameter	Value
Battery	SLI Battery
ETN	591401074
Battery Capacity [Ah]	91 Ah
Cold Cranking Amps (CCA), EN [A]	740 A
Length [mm]	305
Width [mm]	178
Height [mm]	222
Layout	I
Terminals	I
Base hold-down	B01
Case size	D3/MII
Weight [Kg]	20,74

Layout

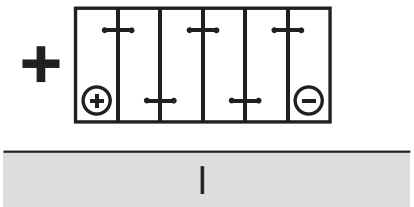

Terminals

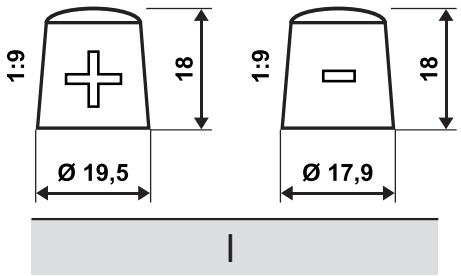

Base hold-down

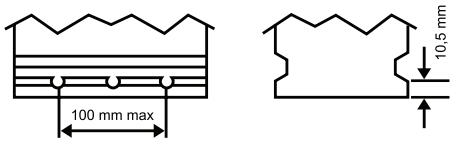

B01

ERA
QUALITY CARE PRECISION

ERA part number: S59317

Technical parameter	Value
Battery	SLI Battery
ETN	593402080
Battery Capacity [Ah]	93 Ah
Cold Cranking Amps (CCA), EN [A]	800 A
Length [mm]	353
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H8/LN5
Weight [Kg]	22,20

Layout

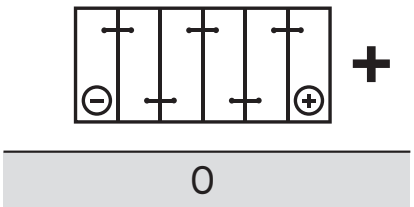

Terminals

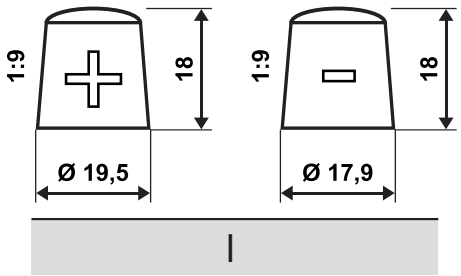

Base hold-down

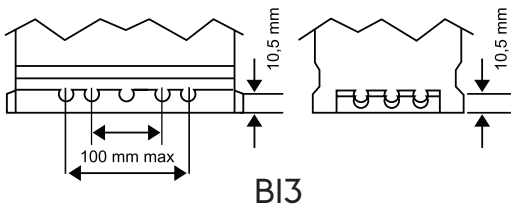

ERA
QUALITY CARE PRECISION

ERA part number: S595I5

Technical parameter	Value
Battery	SLI Battery
ETN	595404083
Battery Capacity [Ah]	95 Ah
Cold Cranking Amps (CCA), EN [A]	830 A
Length [mm]	306
Width [mm]	I73
Height [mm]	225
Layout	0
Terminals	I
Base hold-down	BOI
Case size	D3I
Weight [Kg]	I9,68

Layout

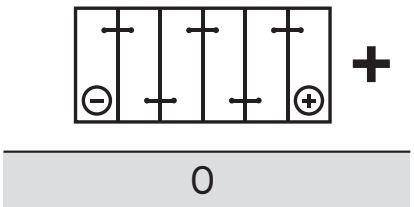

Terminals

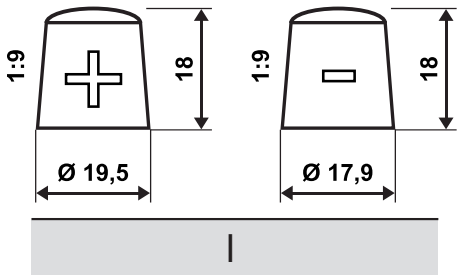

Base hold-down

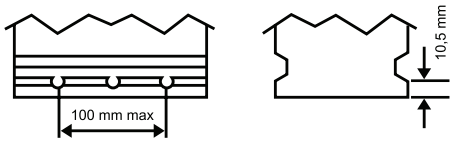

BOI

ERA
QUALITY CARE PRECISION

ERA part number: S59506

Technical parameter	Value
Battery	SLI Battery
ETN	595405083
Battery Capacity [Ah]	95 Ah
Cold Cranking Amps (CCA), EN [A]	830 A
Length [mm]	306
Width [mm]	173
Height [mm]	225
Layout	I
Terminals	I
Base hold-down	B01
Case size	D31R
Weight [Kg]	19,68

Layout

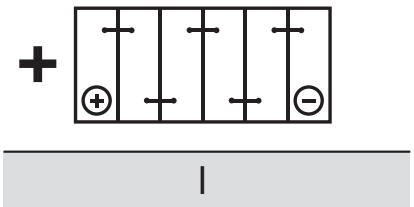

Terminals

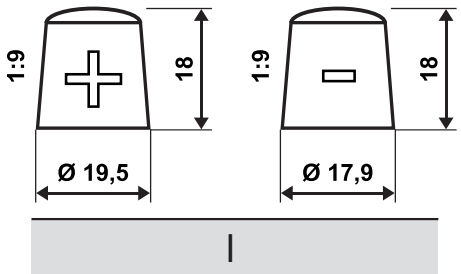

Base hold-down

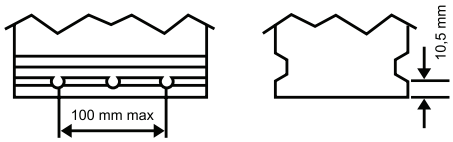

B01

ERA
QUALITY CARE PRECISION

ERA part number: S60018

Technical parameter	Value
Battery	SLI Battery
ETN	600402083
Battery Capacity [Ah]	100 Ah
Cold Cranking Amps (CCA), EN [A]	830 A
Length [mm]	353
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	1
Base hold-down	B13
Case size	H8/LN5
Weight [Kg]	23,14

Layout

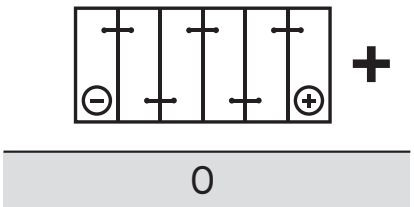

Terminals

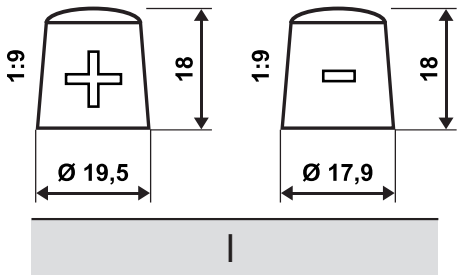

Base hold-down

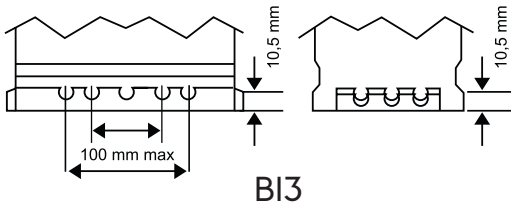

ERA
QUALITY CARE PRECISION

ERA part number: S60017

Technical parameter	Value
Battery	SLI Battery
ETN	600123072
Battery Capacity [Ah]	100 Ah
Cold Cranking Amps (CCA), EN [A]	720 A
Length [mm]	313
Width [mm]	175
Height [mm]	205
Layout	0
Terminals	I
Base hold-down	B13
Case size	GB28
Weight [Kg]	22,60

Layout

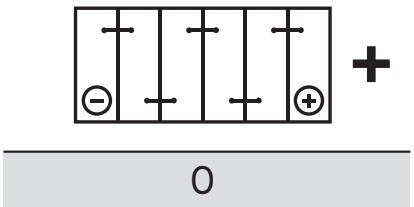

Terminals

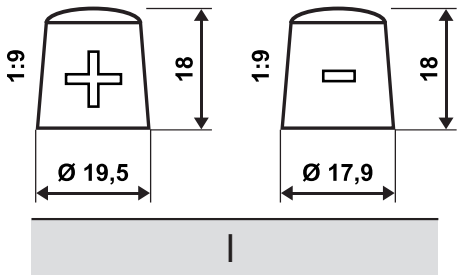

Base hold-down

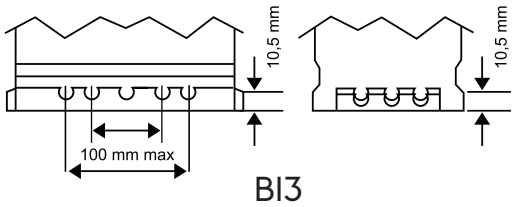

ERA
QUALITY CARE PRECISION

ERA part number: T61051

Technical parameter	Value
Battery	SLI Battery
ETN	610013076
Battery Capacity [Ah]	110 Ah
Cold Cranking Amps (CCA), EN [A]	760 A
Length [mm]	514
Width [mm]	175
Height [mm]	210
Layout	3
Terminals	1
Base hold-down	B03
Case size	MAC 110
Weight [Kg]	30,97

Layout



3

Terminals

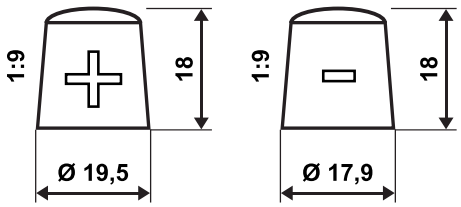

1

Base hold-down

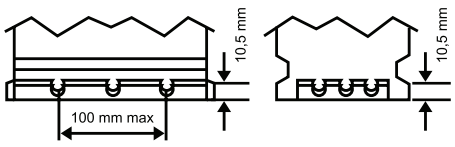

B03

ERA
QUALITY CARE PRECISION

ERA part number: T61013

Technical parameter	Value
Battery	SLI Battery
ETN	610404068
Battery Capacity [Ah]	110 Ah
Cold Cranking Amps (CCA), EN [A]	680 A
Length [mm]	349
Width [mm]	175
Height [mm]	239
Layout	0
Terminals	1
Base hold-down	B01
Case size	LOT 7
Weight [Kg]	26,80

Layout

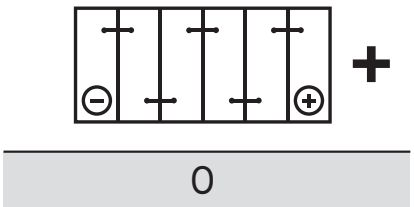

Terminals

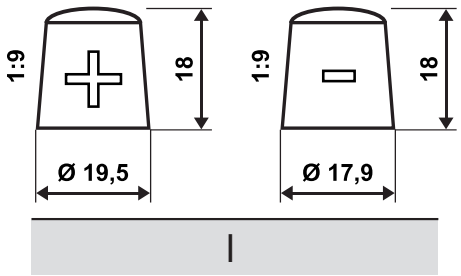

Base hold-down

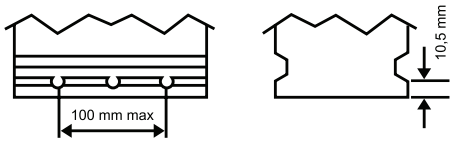

B01

ERA
QUALITY CARE PRECISION

ERA part number: T6205I

Technical parameter	Value
Battery	SLI Battery
ETN	620045068
Battery Capacity [Ah]	120 Ah
Cold Cranking Amps (CCA), EN [A]	680 A
Length [mm]	513
Width [mm]	189
Height [mm]	223
Layout	3
Terminals	I
Base hold-down	B00
Case size	TYP A
Weight [Kg]	33,64

Layout



3

Terminals

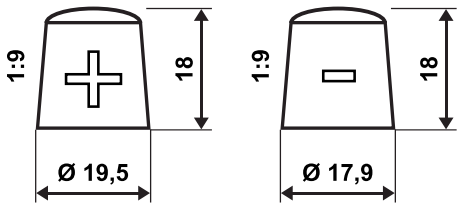

I

Base hold-down



B00

ERA
QUALITY CARE PRECISION

ERA part number: T62064

Technical parameter	Value
Battery	SLI Battery
ETN	620109076
Battery Capacity [Ah]	120 Ah
Cold Cranking Amps (CCA), EN [A]	760 A
Length [mm]	510
Width [mm]	175
Height [mm]	228
Layout	4
Terminals	1
Base hold-down	B03
Case size	MAC 120
Weight [Kg]	35,12

Layout



4

Terminals

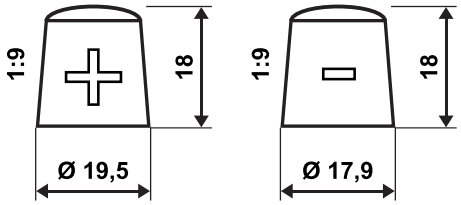

1

Base hold-down

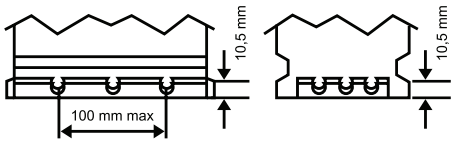

B03

ERA
QUALITY CARE PRECISION

ERA part number: T62010

Technical parameter	Value
Battery	SLI Battery
ETN	620010087
Battery Capacity [Ah]	120 Ah
Cold Cranking Amps (CCA), EN [A]	870 A
Length [mm]	349
Width [mm]	175
Height [mm]	235
Layout	0
Terminals	1
Base hold-down	B01
Case size	D02
Weight [Kg]	27,50

Layout

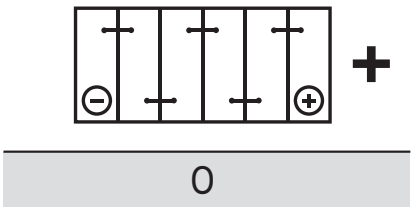

Terminals

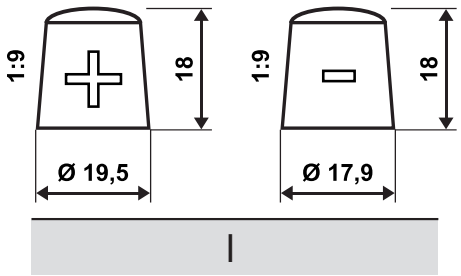

Base hold-down

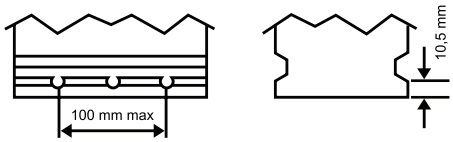

B01

ERA
QUALITY CARE PRECISION

ERA part number: T64053

Technical parameter	Value
Battery	SLI Battery
ETN	640036076
Battery Capacity [Ah]	140 Ah
Cold Cranking Amps (CCA), EN [A]	760 A
Length [mm]	513
Width [mm]	190
Height [mm]	217
Layout	3
Terminals	1
Base hold-down	B03
Case size	TYP A/MB14
Weight [Kg]	34,69

Layout



3

Terminals

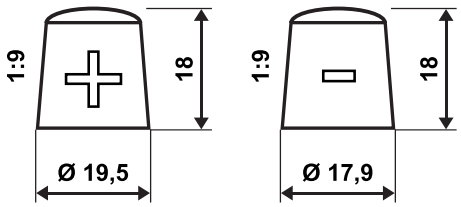

1

Base hold-down

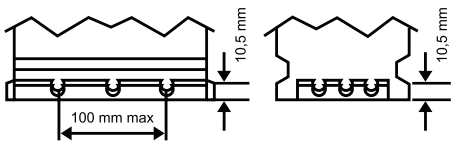

B03

ERA
QUALITY CARE PRECISION

ERA part number: T64052

Technical parameter	Value
Battery	SLI Battery
ETN	640103080
Battery Capacity [Ah]	140 Ah
Cold Cranking Amps (CCA), EN [A]	800 A
Length [mm]	513
Width [mm]	189
Height [mm]	223
Layout	3
Terminals	I
Base hold-down	B00
Case size	TYP A
Weight [Kg]	34,69

Layout

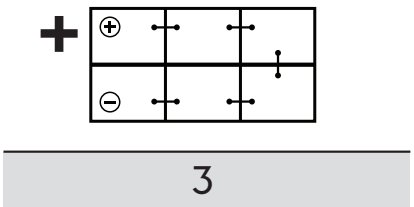

Terminals

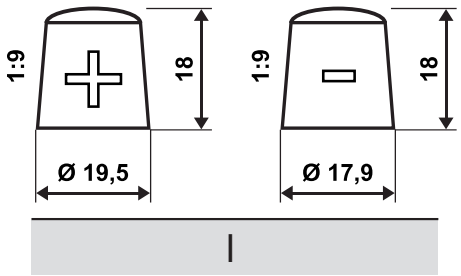

Base hold-down

B00

ERA
QUALITY CARE PRECISION

ERA part number: T67054

Technical parameter	Value
Battery	SLI Battery
ETN	670043100
Battery Capacity [Ah]	170 Ah
Cold Cranking Amps (CCA), EN [A]	1 000 A
Length [mm]	513
Width [mm]	223
Height [mm]	223
Layout	3
Terminals	1
Base hold-down	B00
Case size	TYP B
Weight [Kg]	43,93

Layout

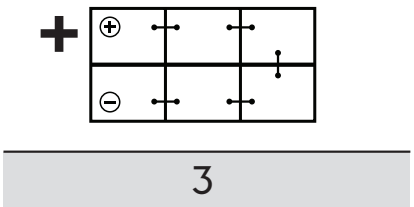

Terminals

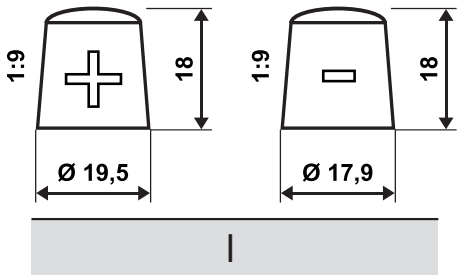

Base hold-down



B00

ERA
QUALITY CARE PRECISION

ERA part number: T68055

Technical parameter	Value
Battery	SLI Battery
ETN	680032100
Battery Capacity [Ah]	180 Ah
Cold Cranking Amps (CCA), EN [A]	1 000 A
Length [mm]	513
Width [mm]	223
Height [mm]	223
Layout	3
Terminals	1
Base hold-down	B00
Case size	TYP B
Weight [Kg]	43,93

Layout



3

Terminals

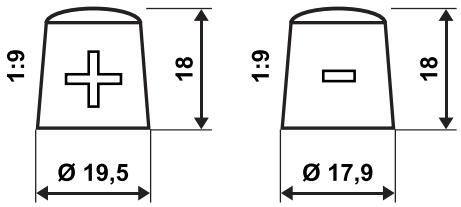

1

Base hold-down

B00

ERA
QUALITY CARE PRECISION

ERA part number: T70056

Technical parameter	Value
Battery	SLI Battery
ETN	700038105
Battery Capacity [Ah]	200 Ah
Cold Cranking Amps (CCA), EN [A]	1 050 A
Length [mm]	518
Width [mm]	273
Height [mm]	242
Layout	3
Terminals	I
Base hold-down	B00
Case size	C
Weight [Kg]	59,80

Layout



3

Terminals

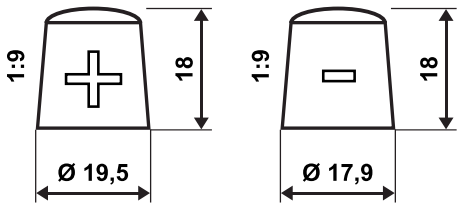

I

Base hold-down

B00

ERA
QUALITY CARE PRECISION

ERA part number: T72557

Technical parameter	Value
Battery	SLI Battery
ETN	725012115
Battery Capacity [Ah]	225 Ah
Cold Cranking Amps (CCA), EN [A]	1150 A
Length [mm]	518
Width [mm]	273
Height [mm]	240
Layout	3
Terminals	1
Base hold-down	B00
Case size	TYP C/M16
Weight [Kg]	55,67

Layout

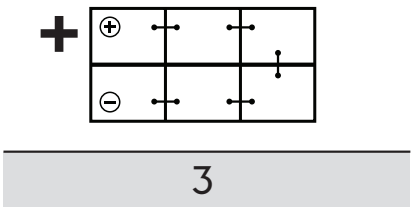

Terminals

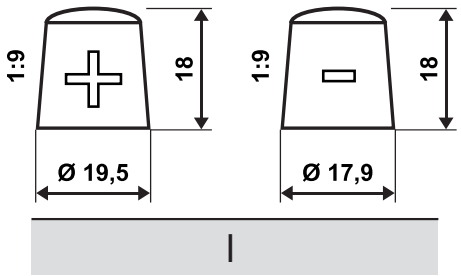

Base hold-down



B00